

FAMILY: **JLEB**

NOTES:



TYPE: **LED EMERGENCY INVERTER(FOR INTERNAL DRIVER)**



CEC DOE FCC

FEATURE

- Durable heavy duty steel housing.
- Innovative, easy installation in minutes.
- 120-277VAC Universal voltage operation.
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation.
- Working voltage 300VDC(OR 220VAC)
- Suitable with LED fixtures up to 10W/20W(for internal driver only) and provide 100% lumen output.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40°C indoor damp location listed.

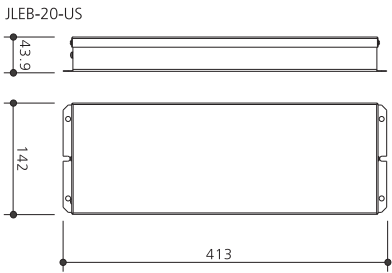

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLEB-10-US	40x25x16.5cm/6pcs	9/8kgs
JLEB-20-US	55x39.5x18.5cm/6pcs	20.8/19.8kgs

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	CONSTANT OUTPUT POWER	EMERGENCY RUN TIME
JLEB-10-US	120-277V	0.065-0.045A	5.5W	10W	90 Mins
JLEB-20-US	120-277V	0.085-0.065A	6.5W	20W	90 Mins